Interglo Lighting aluminium profile system ideal for pelmet lighting, and installation into joinery. Paired with Galaxy Pro LED strip, this product is ideal in retail, and hospitality environments

GEO SI708

GEO ARCHITECTURAL

linear lighting

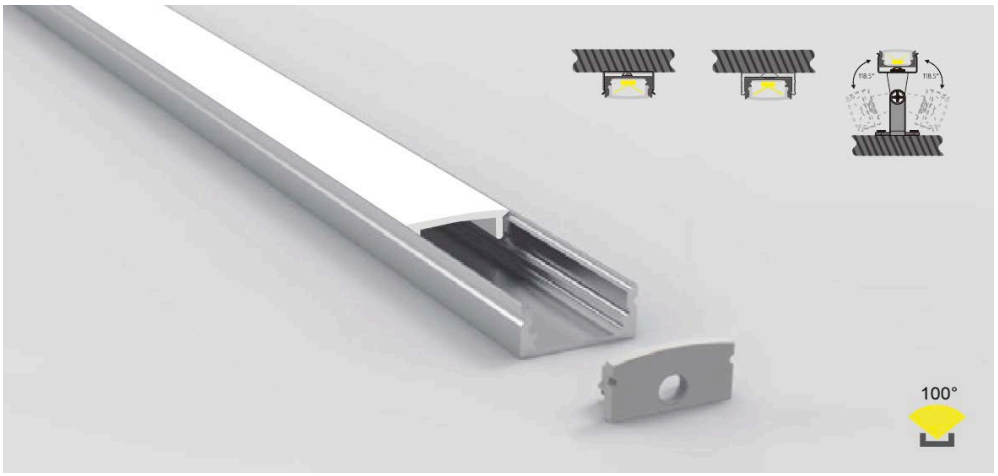





Specifications

Colour ☐ Silver ☐ Black ☐ Custom

End Caps ☐ Yes ☐ No

LED Tape

Galaxy Pro COB 2700K | 6000K

Width	10mm
Voltage	24V DC
LED Qty	400 - 800 LEDs/M
Cut Increment	10mm

Options

Colour Temp ☐ 2700K ☐ 3000K ☐ 4000K ☐ 6000K

Other

Power ☐ 9W/m COB ☐ 15W/m COB

IP Rating ☐ IP20 ☐ IP65 ☐ IP67

LED Outputs

3000K - 9W COB 620LM | 15W COB 1034LM
4000K - 9W COB 660LM | 15W COB 1100LM
6000K - 9W COB 695LM | 15W COB 1160LM

Driver Options

Dimming

☐ Non Dim ☐ DALI/Switch Dim ☐ 1-10V ☐ Phase Cut

Project Details

Project Name

Fitting Type