
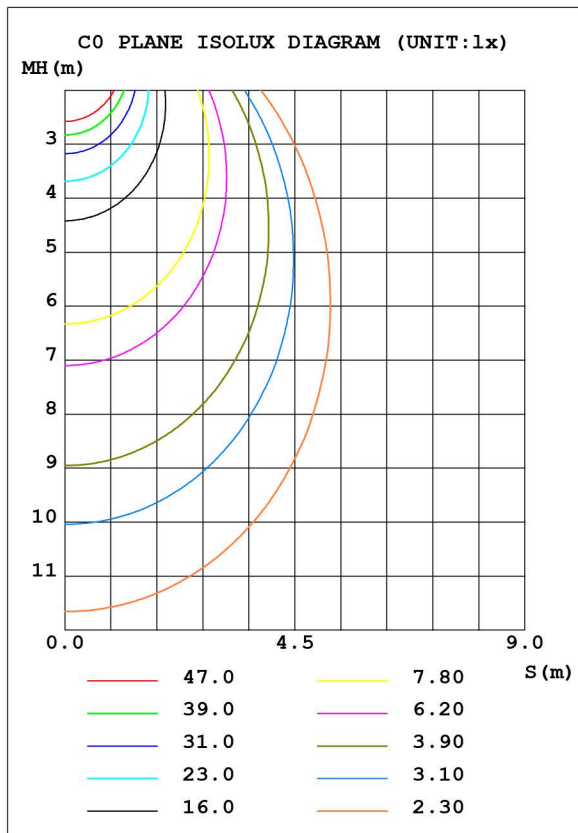


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:235.7V I:0.0454A P:9.618W PF:0.8987 Lamp Flux:749.73x1 lm		
NAME: EW051-DL3-10W	TYPE:EW051-DL3-10W	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: Eway	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	EW051-DL3-10W	Imax (cd)	309.2	S/MH (C0/180)	1.16
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.14
RATED VOLTAGE (V)	236	TOTAL FLUX (lm)	749.73	η UP, DN (C0-180)	0.9, 48.3
NOMINAL FLUX (lm)	749.73	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.1, 49.7
LAMPS INSIDE	1	η up (%)	2.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	235.1	η down (%)	98.0	CIBSE SHR MAX	1.30

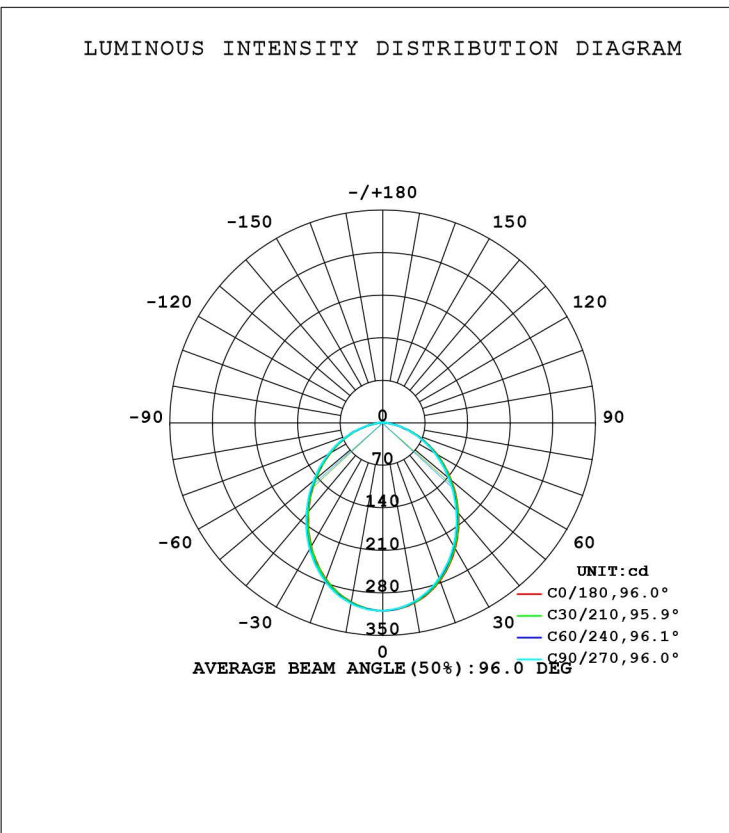

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Lee
 Test Date:2018-03-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.265
 Humidity:65.0%
 Test Distance:8.325m [K=1.0000]
 Remarks: